

IRONGUARD WP-488

Characteristics:

Appearance: Amber

pH of a 10% Solution:9.0

Odor: Mild

PACKAGING:
DRUMS



PRODUCT DESCRIPTION:

IRONGUARD WP-488 is a water dilutable rust preventative designed to be used on ferrous alloys at a concentration of 15-25%. At 15%, rust protection up to 6 months or more has been experienced on parts stored indoors.

The IRONGUARD WP-488 film is durable and self-healing and can easily be removed with an alkaline cleaner.


Mixing Procedure:

Normal concentration range is 10 % to 15% by volume. Agitate water when adding the WP-488 for thorough dispersion. Do not add water into the WP-488.

APPLICATION DESCRIPTION:

For use in the final stage of spray washers, dip tanks, as a corrosion preventative in pressure test tanks, and many other uses.

Temperatures can range from ambient to 165F.

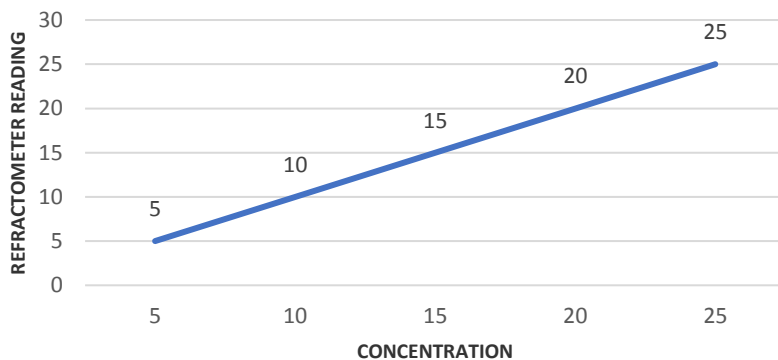

REFRACTIVE INDEX	5.0	10.0	15.0	20.0	25.0
CONCENTRATION	5.0	10.0	15.0	20.0	25.0

*Please read & follow Safety Data Sheet prior to use.