

GRIFCUT 731

Features & Benefits

- Suitable for Mixed Metal Machining
- Extended Sump Life
- Excellent Machining Performance
- Operator Friendly
- Stable Emulsion
- Contains no Sulfate Salts



PACKAGING:

Totes
Drums



PRODUCT DESCRIPTION:


GRIFCUT 731 is a high-performance semi synthetic cutting fluid. The product incorporates a non-sulfonated emulsification system that eliminates Monday morning odors. **GRIFCUT 731** is engineered for machining ferrous and non-ferrous alloys, and is suitable for milling, drilling, reaming, tapping and general-purpose machining.

TYPICAL CHARACTERISTICS:

FORM: Liquid
 APPEARANCE: Amber
 ODOR: Slight
 FLASH POINT: N/A
 REFRACTOMETER FACTOR: 1.67
 Ph (5%): 9.3 – 9.7
 SPECIFIC GRAVITY: 0.98

RECOMMENDED CONCENTRATION

Light Machining & Grinding	3 – 5%
Moderate Machining	5 – 7%
Heavy Duty Machining	7 – 10%

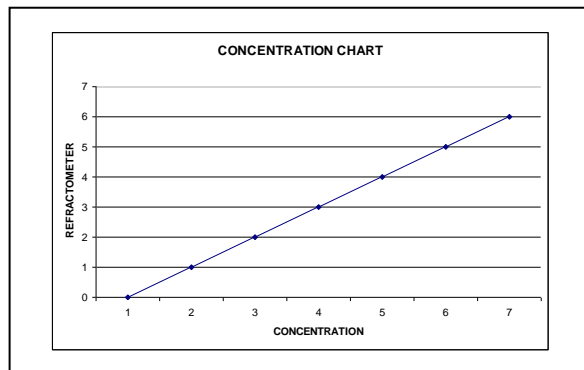

HEALTH & SAFETY

All reasonable care has been taken to ensure that the information contained in this publication is accurate as the date of printing, however, such information might change due to changes in the formulation blend occurring subsequent to the date of printing. The MSDS must be consulted for appropriate information regarding storage, safe handling and storage.